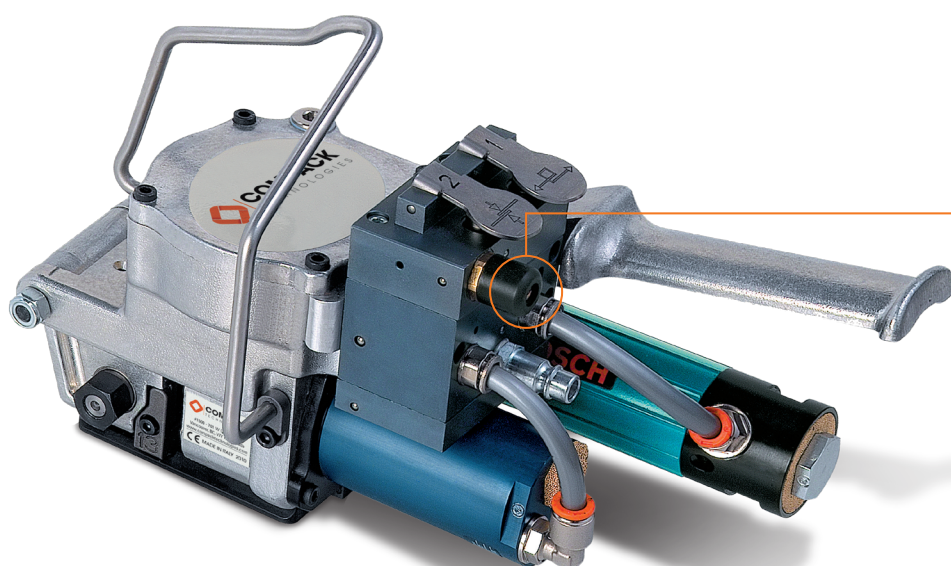


**CTS 450****PNEUMATIC STRAPPING TOOL FOR POLYPROPYLENE  
AND POLYESTER STRAP WITH VIBRATION SEALING****COMPACK**  
TECHNOLOGIES• New system for welding  
time adjustment

## MODEL

| CODE            | TYPE               | STRAP                          | THICKNESS                   |
|-----------------|--------------------|--------------------------------|-----------------------------|
| <b>C4510412</b> | CTS 450 -10mm *    | PP-PET<br>10 mm • 3/8"         | 0.4-1.2 mm<br>0.016"-0.047" |
| <b>C4513412</b> | CTS 450 -13mm *    | PP-PET<br>13 mm • 1/2"         | 0.4-1.2 mm<br>0.016"-0.047" |
| <b>C4569412</b> | CTS 450 -16/19mm * | PP-PET<br>16-19 mm • 5/8"-3/4" | 0.4-1.2 mm<br>0.016"-0.047" |

\*\* only with friction on tensioning

## TECHNICAL SPECIFICATIONS

### DIMENSIONS

|        |                    |
|--------|--------------------|
| Length | 280 mm • 11"       |
| Width  | 150 mm • 6"        |
| Height | 175 mm • 6.9"      |
| Weight | 4.9 Kgs • 10.8 lbs |


### FEEDING

|                 |                        |
|-----------------|------------------------|
| Pressure range  | 4.5 -7 bar / 64-99 psi |
| Air consumption | 14 L/s – 29 cuft/min   |

### PERFORMANCE

|                    |                                                     |
|--------------------|-----------------------------------------------------|
| Max. tension force | 2500 N - 6.5 bar- 92psi<br>(variable with friction) |
| Tensioning speed   | 11 mt/m                                             |
| Sealing            | Vibration sealing                                   |
| Joint strength     | 80% of breaking strength*                           |
| Gear ratio         | -                                                   |

\* variable according to strap type

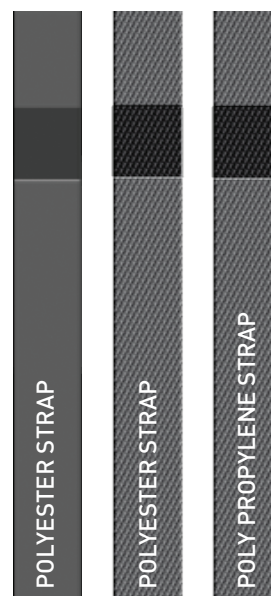

Compack Technologies  
15th Floor, Suite#1500 -701 West Georgia St.  
Vancouver, BC, V7Y 1C6  
Canada  
T: +1 (604) 801-5922  
F: +1 (604) 801-5911  
[www.compacktechnologies.com](http://www.compacktechnologies.com)

**COMPACK**  
TECHNOLOGIES